


IP65 Internal Digital Caliper Gauges

400 Series



400-31-0

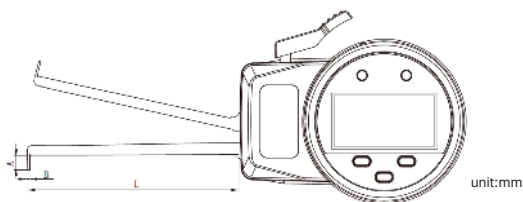


FEATURES

- Designed to measure internal grooves, and other intricate detailed internal characteristics
- This measuring instrument provides comparison readings and must be set to the nominal dimension using either micrometer or setting ring
- Button function: On/Off, mm/inch, Preset, Hold, Tol
- Support bluetooth data transmission (optional)
- Built-in rechargeable lithium battery, magnetic charging port, convenient and fast
- Auto-Off
- Protection level IP65



Inch				Metric			Dimensions			
Code No.	Range	Resolution	Accuracy	Range	Resolution	Accuracy	Data Output Type	A	B	L
400-31-0	.2- .6"	.0001"	±.0006"	5-15mm	0.002mm	±0.015mm	-	2.3mm	0.8mm	35mm
400-32-0	.4-1.2"	.0002"	±.001"	10-30mm	0.005mm	±0.025mm	-	5.2mm	1.2mm	85mm
400-33-0	1.2-2"	.0002"	±.001"	30-50mm	0.005mm	±0.025mm	-	7.2mm	1.2mm	85mm
400-34-0	2-4"	.0005"	±.002"	50-100mm	0.010mm	±0.050mm	-	11.7mm	2.4mm	236mm
400-35-0	4-6"	.0005"	±.002"	100-150mm	0.010mm	±0.050mm	-	11.7mm	2.4mm	236mm
400-36-0	6-8"	.0005"	±.002"	150-200mm	0.010mm	±0.050mm	-	11.7mm	2.4mm	236mm
400-31-2	.2- .6"	.0001"	±.0006"	5-15mm	0.002mm	±0.015mm	Bluetooth	2.3mm	0.8mm	35mm
400-32-2	.4-1.2"	.0002"	±.001"	10-30mm	0.005mm	±0.025mm	Bluetooth	5.2mm	1.2mm	85mm
400-33-2	1.2-2"	.0002"	±.001"	30-50mm	0.005mm	±0.025mm	Bluetooth	7.2mm	1.2mm	85mm
400-34-2	2-4"	.0005"	±.002"	50-100mm	0.010mm	±0.050mm	Bluetooth	11.7mm	2.4mm	236mm
400-35-2	4-6"	.0005"	±.002"	100-150mm	0.010mm	±0.050mm	Bluetooth	11.7mm	2.4mm	236mm
400-36-2	6-8"	.0005"	±.002"	150-200mm	0.010mm	±0.050mm	Bluetooth	11.7mm	2.4mm	236mm

SOMEKO




IP65 External Digital Caliper Gauges

404 Series



404-31-0

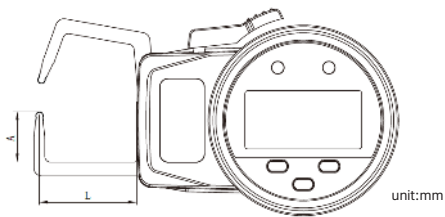

FEATURES

- Designed to measure hard to access external work piece characteristics. This measuring instrument provides comparison readings and must be set to the nominal dimension using either gauge blocks or an external setting master
- Button function: On/Off, mm/inch, Preset, Hold, Tol
- Support Bluetooth data transmission (optional)
- Built-in rechargeable lithium battery, magnetic charging port, convenient and fast
- Auto-Off
- Protection level IP65



Inch				Metric			Dimensions			
Code No.	Range	Resolution	Accuracy	Range	Resolution	Accuracy	Data Output Type	A	B	L
404-31-0	0-.4"	.0001"	±.0005"	0-10mm	0.002mm	±0.01mm	-	19.1mm	1mm	35mm
404-32-0	0-.8"	.0002"	±.0008"	0-20mm	0.005mm	±0.02mm	-	24.7mm	1mm	85mm
404-33-0	0-1.2"	.0005"	±.0012"	0-30mm	0.010mm	±0.03mm	-	30mm	1mm	116mm
404-34-0	0-2"	.0005"	±.0016"	0-50mm	0.010mm	±0.04mm	-	30mm	1mm	167mm
404-35-0	0-4"	.0005"	±.0030"	0-100mm	0.010mm	±0.07mm	-	35mm	1mm	382mm
404-31-2	0-.4"	.0001"	±.0005"	0-10mm	0.002mm	±0.01mm	Bluetooth	19.1mm	1mm	35mm
404-32-2	0-.8"	.0002"	±.0008"	0-20mm	0.005mm	±0.02mm	Bluetooth	24.7mm	1mm	85mm
404-33-2	0-1.2"	.0005"	±.0012"	0-30mm	0.010mm	±0.03mm	Bluetooth	30mm	1mm	116mm
404-34-2	0-2"	.0005"	±.0016"	0-50mm	0.010mm	±0.04mm	Bluetooth	30mm	1mm	167mm
404-35-2	0-4"	.0005"	±.0030"	0-100mm	0.010mm	±0.07mm	Bluetooth	35mm	1mm	382mm

SOMEKO